


# SS.SEB

## STAINLESS STEEL SWIVEL EYE BOLT

METRIC THREADS

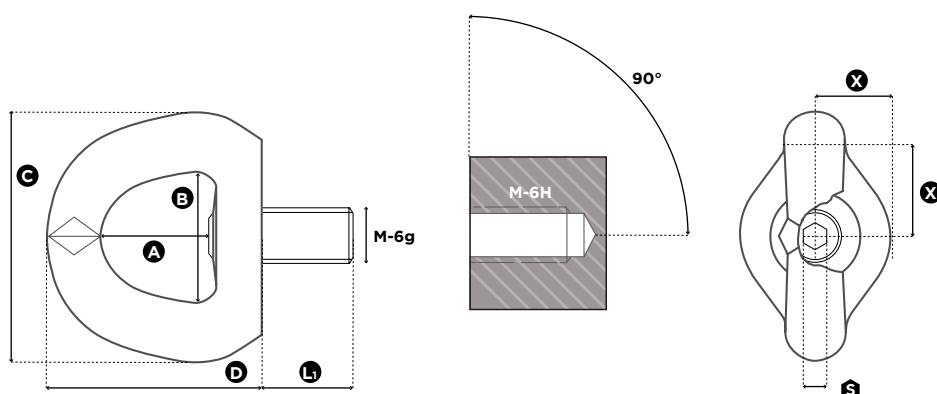

1 in = 25.4 mm

| Reference   | Diameter     | SF 5:1<br>WLL<br>(t) | SF 4:1<br>WLL<br>(t) | Standard<br>L <sub>1</sub><br>(mm) | Torque<br>(Nm) | X<br>(mm) | S<br>(mm) | A<br>(mm) | B<br>(mm) | C<br>(mm) | D<br>(mm) | Weight<br>(kg) |
|-------------|--------------|----------------------|----------------------|------------------------------------|----------------|-----------|-----------|-----------|-----------|-----------|-----------|----------------|
| SS.SEB M 12 | M 12 (x1,75) | 0,55                 | 0,55*                | 21                                 | 15             | 35        | 8         | 38        | 45        | 90        | 80        | 0,80           |
| SS.SEB M 16 | M 16 (x2)    | 1,20                 | 1,20*                | 27                                 | 50             | 35        | 8         | 38        | 45        | 90        | 80        | 0,82           |
| SS.SEB M 20 | M 20 (x2,5)  | 1,50                 | 1,50*                | 30                                 | 100            | 35        | 8         | 38        | 45        | 90        | 80        | 0,84           |
| SS.SEB M 24 | M 24 (x3)    | 2,50                 | 2,50*                | 36                                 | 100            | 50        | 8         | 38        | 45        | 90        | 80        | 0,90           |

\* In certification process / En cours d'homologation / In Entwicklungsphase / En proceso de homologación